

**INTEGRA™**
5-Liter Oxygen Concentrator by SeQual®



ATF® reliability. Without fail.

Patented simplicity.

The patented ATF[®] module gives the Integra[™] unparalleled benefits . . .

In Maintenance . . .

Patented ATF[®] module (Advanced Technology Fractionator) eliminates more than 200 troublesome parts found in conventional oxygen concentrators!

- No failure-prone solenoid valves
- 40 fewer pneumatic connections
- 35 fewer electrical connections
- No electronics for valve sequencing
- No pressure-reducing regulator

One mechanically integrated module, with a single moving part made of space-age composites.

- Maintenance-free
- Self-cleaning
- Insensitive to contamination
- Invulnerable to wear

A compressor built for steady-state operation is matched to the ATF[®]'s constant low-pressure operation. The result? Elimination of the pressure swings that cause costly compressor rebuilds.

True zero-clearance cabinet design eliminates the risk of overheating from blocked air intake.

For the Dealer/Provider . . .

- Reliable alarms are not battery-dependent
- Compact cabinet with integrated handle makes transport easy
- Steel-fork casters stand up to rough handling
- Out-of-sight hour meter is easy for technicians to read, without opening cabinet
- Double-insulated cabinet with two-prong power cord (grounded outlet not needed)
- Durable, molded color cabinet retains new look
- 'Bumper-to-bumper' warranty for lower life-cycle cost

For the User . . .

- Delivers up to 5 liters per minute of continuous oxygen
- Compact cabinet with integrated handle and four swivel-casters make movement easy
- Single, easy-to-clean cabinet intake filter is highly visible
- Panel-mounted circuit breaker for convenient reset
- Added safety from a restriction-sensitive flow meter
- Large, easy-to-reach, easy-to-turn flow-control knob
- On-board oxygen analyzer (optional) has a three-light display to continuously monitor performance



The patented ATF[®] module: No other concentrator delivers the low-maintenance, problem-free operation of SeQual's ATF[®]-based Integra[™]. That's why it's protected by a ring of patents. And why we offer the protection of a 'bumper-to-bumper' warranty — the best in the business.

SeQual's 'bumper-to-bumper' warranty is the best in the industry.

Technology proven worldwide.




Humidifier cavity accepts the most difficult bottle sizes.



A "zero-clearance" air intake located atop the Integra™ prevents overheating if the unit is pushed against walls or draperies.



Simplified controls give users confidence and eliminate routine questions.

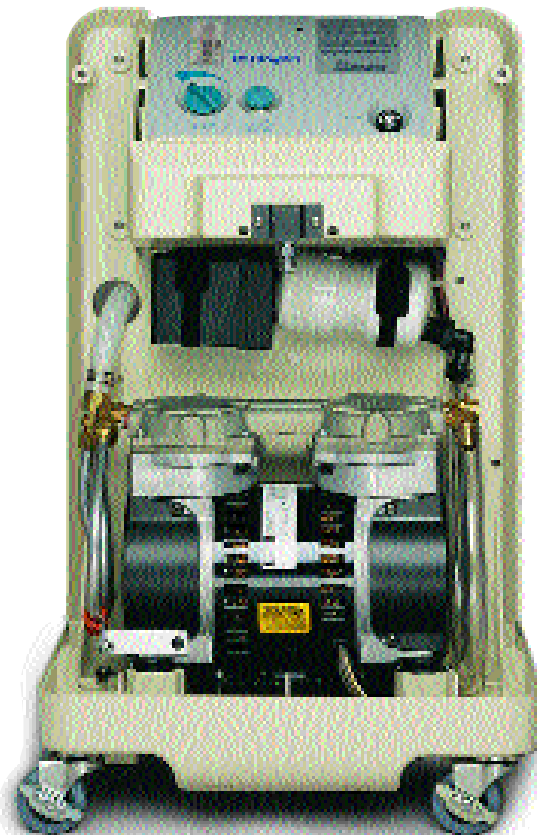

With oxygen production dependent upon just two components, (the maintenance-free ATP® module and a compressor built for steady-state operation) unscheduled service is a thing of the past. Scheduled maintenance now becomes the annual replacement of the compressor's low-cost intake filter . . . a five-minute task. Less service means lower life cycle costs.



SeQual: Improving Life for Patient and Provider

SeQual Technologies Inc. was established to develop and market a dramatically improved home oxygen system with revolutionary reliability, quality and economy. Quality-driven from the beginning, the company took the name: SeQual® and made an absolute commitment to see quality in all of its products and services. As to the future – SeQual® maintains a major research and development effort focused on delivery of innovative products. Providers worldwide look to SeQual® as the pacesetter in innovation and excellence and as the company that understands and cares about them and their success.



11436 Sorrento Valley Road
 San Diego, CA 92121
 Tel. 800/826-4610, 858/558-0202
 Fax: 858/558-1915
 Email: medicalsales@sequal.com
 Web: www.sequal.com

Integra™ Specifications

Performance

Flow Rate: Variable, 1/4 - 5 LPM (1/4 liter increments)

O₂ Concentration

95% to 92% @ 0-3 LPM flow

95% to 90% @ 3-5 LPM flow

O₂ Pressure: 5 PSIG (37.9Kpa) minimum

Patient Controls

Control-panel-mounted On/Off switch

Control-panel-mounted Reset switch

Recessed, large, low-resistance Flow Control knob

Restriction-sensitive Flow Meter

Alarms (no battery required)

Power Failure

O₂ Concentration (optional on some models)

Irregular Pressure

General

Size: 26.0 H x 14.7 W x 10.1 Deep (in)

58.4 H x 39.4 W x 47.0 Deep (cm)

Weight: 54 lbs. (24 Kg)

Approvals

Class II Equipment

CE Mark (Part #2371 only)

Double Insulated 

Type B Applied Part 

Model Selection Guide

Part No. 2380	Integra™ Model 6323 Basic Without O ₂ monitor 110 volt; 60 cycle
Part No. 2363	Integra™ Model 6323 Basic Without O ₂ monitor 220 volt; 50 cycle
Part No. 2063	Integra™ Model 6323 OM With O ₂ monitor 110 volt; 60 cycle
Part No. 2371	Integra™ Model 6323 OM With O ₂ monitor 220 volt; 50 cycle

Country-specific adaptations and instrumentation may be available. Please contact SeQual for appropriate part numbers.

Customer Service Department

SeQual® Technologies Inc.

11436 Sorrento Valley Road

San Diego, CA 92121

Tel. 1(800)826-4610

Fax: 1(858)558-1915

E-mail: medicalsales@sequal.com

Web site: www.sequal.com

Toll Free Order Fax: 1 (877)786-9943

Europe

EuroMed Medizintechnik GmbH & Co. KG

Am Bahndamm 2

D-53560 Vettelschoss, Germany

Tel. +49(0)2645-972280

Fax: +49(0)2645-972282

E-mail: euromed1@aol.com